This Page Is Inserted by IFW Operations and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents will not correct images, please do not report the images to the Image Problems Mailbox.

Sexual sterilisation device

Patent number:

GB2190297

Publication date:

1987-11-18

Inventor:

FILSHIE GILBER MARCUS:

MCQUILKIN PETER H

Applicant:

FEMCARE LTD

Classification:

- international:

A61B17/12


- european:

A61F6/20C

Application number: GB19870010973 19870508 Priority number(s): GB19860011452 19860510

Abstract of GB2190297

The device comprises a pair of hinged jaws, (12,14;52,54) made of plastics material which close together to occlude a duct clamped between the jaws. The jaws are preferably lined with a silicone or similar rubber (20,22;64) material and can be provided with serrations or teeth which may be cross hatched to hold the duct in position during closure of the clip and the jaws can be provided with at least one permanent latch arrangement (28,30;58,60) which prevents opening of the clip once the clip has been fully closed. The clip may also include an auxiliary tongue (18;62) and may be moulded in one piece with a thinned portion (56) forming the hinge.

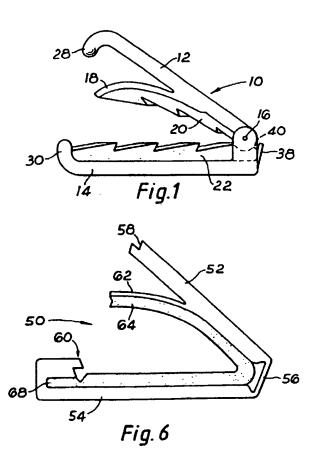

Also published as:

🔁 GB2226958 (A)

Data supplied from the esp@c net database - Worldwide

UK Patent Application GB GB GB 2 190 297 GB A

(43) Application published 18 Nov 1987

(21) Application No 8710973

(22) Date of filing 8 May 1987

(30) Priority data (31) 8611452

(32) 10 May 1986

(33) GB

(71) Applicant

Femcare Limited

(Incorporated in United Kingdom)

Bar Lane Industrial Park, Bar Lane, Basford, Nottingham NG6 0JA

(72) Inventors Peter H McQuilkin Gilber Marcus Filshie

(74) Agent and/or Address for Service Eric Potter & Clarkson, 14 Oxford Street, Nottingham NG1 5BP (51) INT CL4 A61B 17/12

(52) Domestic classification (Edition I): **A5R EL**

(56) Documents cited

GB A 2069848 GB 1420459 GB 1020035 EP A2 0105797 WO A1 83/03345 US 4212303 WO A1 80/01752 US 4188953 US 4394864 US 3766925


US 4337774


(58) Field of search A5R

Selected US specifications from IPC sub-class A61B


(54) Sexual sterilisation device


(57) The device comprises a pair of hinged jaws, (12,14;52,54) made of plastics material which close together to occlude a duct clamped between the laws. The laws are preferably lined with a silicone or similar rubber (20,22;64) material and can be provided with serrations or teeth which may be cross hatched to hold the duct in position during closure of the clip and the jaws can be provided with at least one permanent latch arrangement (28,30;58,60) which prevents opening of the clip once the clip has been fully closed. The clip may also include an auxiliary tongue (18;62) and may be moulded in one piece with a thinned portion (56) forming the hinge.





The drawings originally filed were informal and the print here reproduced is taken from a later filed formal copy.

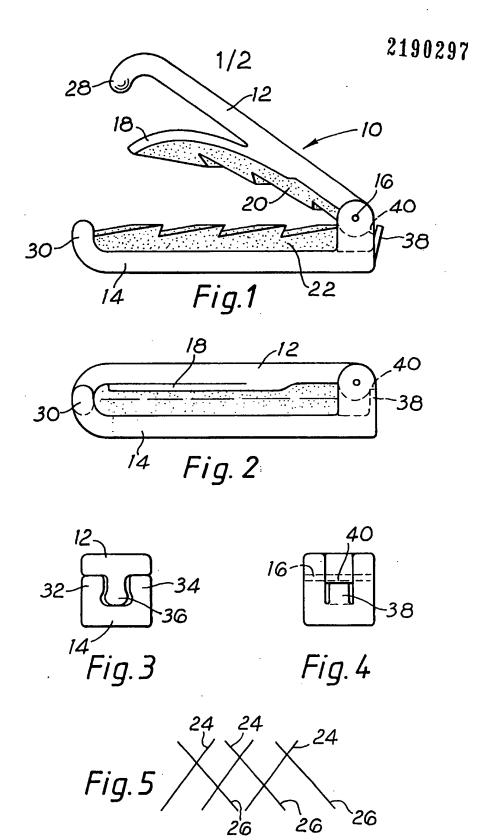

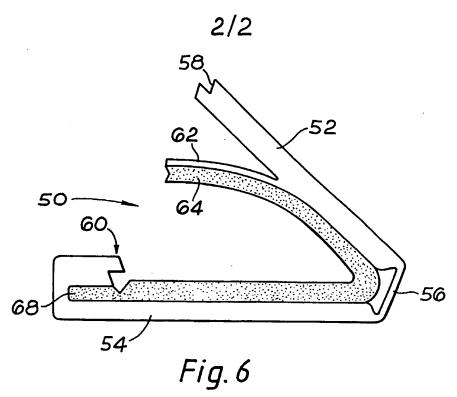

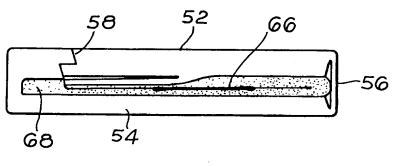


Fig. 7

SPECIFICATION

Sexual sterilisation device

5 The present invention relates to a sexual sterilisation device and more particularly to a clip adapted to be clamped on a Fallopian tube or a vas deferens to effect occlusion thereof.

U.K. Patent No. 1,530,282 and our co10 pending Patent Application No. 8517468 describe clips of this type but these are designed primarily to be made with a metallic
frame. Since the metal from which the clips
are made is of a high quality metal such as
15 commercially pure titanium the clips are relatively expensive to produce.

It is an object of the present invention to provide a clip of this type which can be made using a frame of plastics material if required.

20 According to the present invention there is provided a sexual sterilisation device in the form of a clip adapted to be clamped on and thereby to occlude a duct through which gametes pass, the clip comprising a pair of clamp-25 ing jaws hinged together the jaws being constructed from a frame of plastics material.

Preferably the frame of plastics material is provided with an internal lining of silicone rubber.

30 The frame preferably comprises an upper jaw member and a lower jaw member, the upper jaw member being provided with a male fixing portion intermateable with a female fixing portion on the lower jaw member.

35 Preferably the silicone rubber lining is provided with a teeth-shaped internal profile, the teeth pointing inwardly towards the hinge.

The clip is preferably also provided with a further catch member at the hinge end of the 40 clip to provide an effective further locking of the clip in the closed position.

Embodiments of the present invention will now be described with reference to the accompanying drawings, in which:

45 Figure 1 shows a clip according to the present invention in side elevation in an open position;

Figure 2 shows the clip of Figure 1 in a closed position;

50 Figure 3 shows the clip of Figure 1 in front elevation;

Figure 4 shows the clip of Figure 1 in rear elevation;

Figure 5 shows the relative disposition of 55 the teeth on the upper and lower jaw members:

Figure 6 shows an alternative clip according to the present invention shown in an open position; and

60 Figure 7 shows th clip of Figur 6 in its closed position.

With reference now to the drawings the clip 10 comprises a first or upper jaw member 12 and a second or lower jaw member 14. The 65 jaw members 12 and 14 are preferably made from a rigid plastics material and are joined together by a hinge pin 16 preferably of commercially pure titanium.

The upper jaw 12 is formed with a flexible tongue member 18 and the upper and lower jaw members are lined with very soft silicone rubber linings 20, 22 which may be glued onto the respective jaws or studded into position with respective holes and lugs sufficient to hold the linings in place prior to closure of the clin

With reference also to Figure 5 the linings 20 and 22 are profiled to have teeth 24, 26 respectively oriented at different angles to the jaw members as shown in Figure 5. The teeth are used to help to capture the fallopian tube (etc) on closure and the different orientation of the upper and lower teeth assists in this process.

The upper jaw 12 is also provided with a male catchment portion 28 which co-operates, in the closed position of the clip, with a female catchment member 30 on the lower jaw member 14. The female jaw member 30 comprises (Figure 3) two upstanding fingers 32, 34 shaped so that a broadened portion 36 of portion 28 can snap into position therebetween in the closed position of the clip.

The bottom jaw member is also preferably provided with a secondary latching means comprising an upstanding flexible latch 38 which in the closed position of the clip snaps into a recessed ledge portion 40 (shown dotted in Figure 1) profiled within the hinge 100 portion of the upper jaw member 12.

In operation the flexible spur or tongue 18 captures the fallopian tube at the front end before final closure of the clip. The thickness and positioning of the silicone rubber liners 105 20, 22 is designed to give the desired pressure on the fallopian tube on closure of the clip. The clip can, prior to the final pressure to close and latch members 38, 40, be opened and closed in a partial manner to ad-

When finally closed the clip is not able to be opened without considerable force due to the rear latching members 38, 40 and is therefore safe to use.

The plastics material from which the clip is made may be impregnated with barium sulphate to make the clip X-ray or radio detectable thereby facilitating remote positioning of the clip.

With reference to Figures 6 and 7 an alternative design of clip 50 is shown again comprising an upper jaw 52 and a lower jaw 54. The two jaw members are joined together by a hinge member 56 which is formed from a
 restricted section of the plastics material

25 restricted section of the plastics material thereby allowing the clip to be moulded in one pelce. The upper jaw 52 is provided with a recessed portion 58 providing a protrusi n which in the clos d position co-operat s with

130 a recessed portion 60 in the lower jaw 54.

The upp r jaw is provid d with a flexible spur or tongue 62 as in the embodiment of Figures 1 to 5 and the inner surface of the clip is lined with a silicone rubber liner 64.

5 When closed the fallopian tube 66 (Figure 7) is completely closed since the silicone rubber lining 64 leaves no space within the clip. The end of the clip as indicated at 68 is fully lined so that there is no possibility of even the 10 smallest space being left within the clip for any gametes to pass.

As in Figure 5 the silicone rubber lining can be provided with opposing teeth to assist in capturing the fallopian tube. The curved ton15 gue initially grasps the fallopian tube for initial capture preventing the escape of the tube on the final forceful closure.

CLAIMS

- 1. A sexual sterilisation device in the form
 of a clip adapted to be clamped on and
 thereby to occlude a duct through which gametes pass, the clip comprising a pair of clamping jaws hinged together the jaws being constructed from a frame of plastics material.
 - A sexual sterilisation device as claimed in Claim 1 in which the frame of plastics material is provided with an internal lining of silicone rubber.
- 3. A sexual sterilisation device as claimed in Claim 2 in which the frame preferably comprises an upper jaw member and a lower jaw member, the upper jaw member being provided with a male fixing portion intermateable
 35 with a female fixing portion on the lower jaw member.
- A sexual sterilisation device as claimed in Claim 3 in which the silicone rubber lining is provided with a teeth-shaped internal profile,
 the teeth pointing inwardly towards the hinge.
- 5. A sexual sterilisation device as claimed in any one of Claims 1 to 4 in which the clip is also provided with a further catch member at the hinge end of the clip to provide an effective further locking of the clip in the closed position.
- 6. A sexual sterilisation dedvice as claimed in any one of Claims 1 to 5 in which one of the clamping jaws is provided with a flexible
 50 spur (or tongue) shaped to protrude from the inner surface of the jaw towards the opposite end to the hinge such that during application the flexible spur captures the fallopian tube prior to final closure of the clip.
- 7. A sexual sterilisation device as claimed in Claim 4 or Claim 6 when dependent on Claim 4 in which the te th profiles on the upper and lower jaws are at an angle with respect to ach other to provide a cross over effect
- 60 thereby assisting in retaining the fallopian tube in position within the jaws during closure of the jaws.
- A sexual sterilisation device as claimed in any one of Claims 1 to 7 in which the pair of 65 clamping jaws are formed integrally from a

single plastic moulding, the hinge being formed from a reduced section of the flexible plastics material.

A sexual sterilisation device substantially
 as described with reference to the accompanying drawings.

Printed in the United Kingdom for Her Majesty's Stationery Office, Dd 8991685, 1986, 4235. Published at The Patent Office, 25 Southampton Buildings. London, WC2A 1AY, from which copies may be obtained.